

# DYNAMIC STORAGE RACK for cable reels

Made in France



Certified compliant  
with NF EN 15512 and  
Eurocodes 3




Individual therefore  
modulable axle supports  
with non-slip system



Rewind-roller with  
cable guide



Non-reversing flange and  
collar for easy unrolling

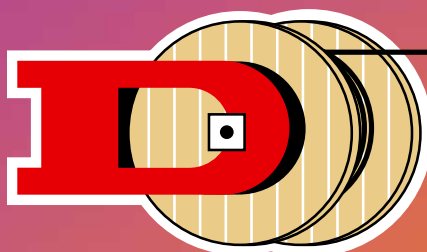

**drouaire & fils** S.A.  
[www.drouaire.com](http://www.drouaire.com)

# Optimize your dynamic storage for your reels up to Ø 2200 mm.



## ■ FEATURES

The configuration of DROUAIRE reel racks is modifiable: single sided or double sided.

They allow vertical storage of 2 to 6 reels.

- Two structures for your choice :
  - standard (up to Ø 1400 mm),
  - reinforced (up to Ø 2200 mm).
- Permitted load per span : up to 8 metric tons.
- Width of span passage : 710, 910 or 1250 mm (Modifiable on demand).
- Ladder depth :
  - 770 mm for single-sided racks,
  - 1750 mm for double-sided racks.
- Ladder height :
  - 3600 mm for 3 or 4 reel storage,
  - 4800 mm for 4 or 5 reel storage,
  - 5700 mm for 5 or 6 reel storage.

## ■ ADVANTAGES

- Minimizes cable unrolling time.
- High impact resistance.
- Major space saving.
- Easy to use – Add reels fast.
- Check your stock at a glance.
- Individual therefore modifiable axle supports require no tools (supports not bolted : non-slip claw-&-key system).
- Rewind-roller with cable guide.
- Portable power-supply reel attaches directly to the rack.



## Accessories

### ■ REEL LOADER



#### For stacker

- Overall width of forks 600 mm.
- Reel max width 600 and max Ø 1050.



#### For forklift

Fork separation must be adjustable with the maximum internal separation at least equal to the maximum width of your reels + 30 mm.

### ■ POWER SUPPLY



#### Gainelec rail with forklift

- 220 V single phase + Earth or 380 V three-phase + neutral + Earth.
- Modifiable by 5-metre straight lengths.



#### Spring-loaded winder

- Useful unrolling length : 20 metres.
- Comes with 3 G 2.5 mm<sup>2</sup> cable for 220 V + E supply.

**DROUAIRE & FILS S.A.**

47160 Villefranche-du-Queyran - FRANCE - Tel. : +33 (0)5 53 88 70 87 - Fax : +33 (0)5 53 88 76 49 - [www.drouaire.com](http://www.drouaire.com)